

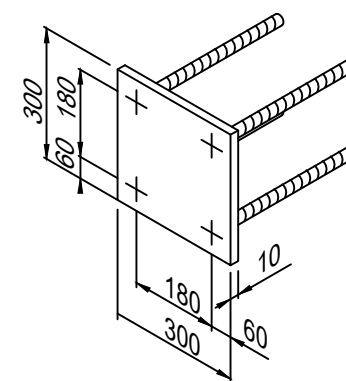
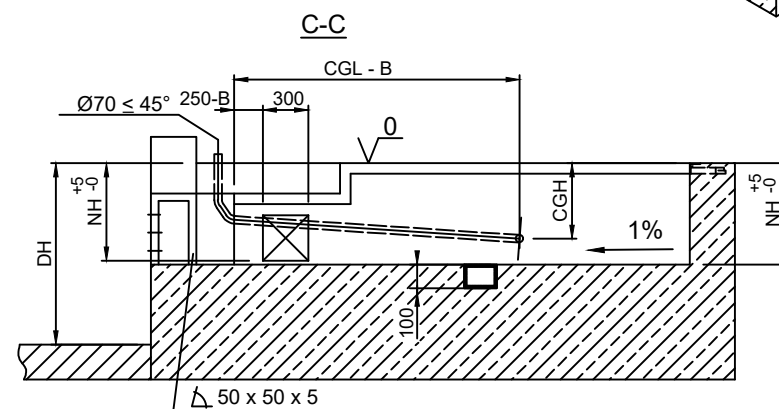
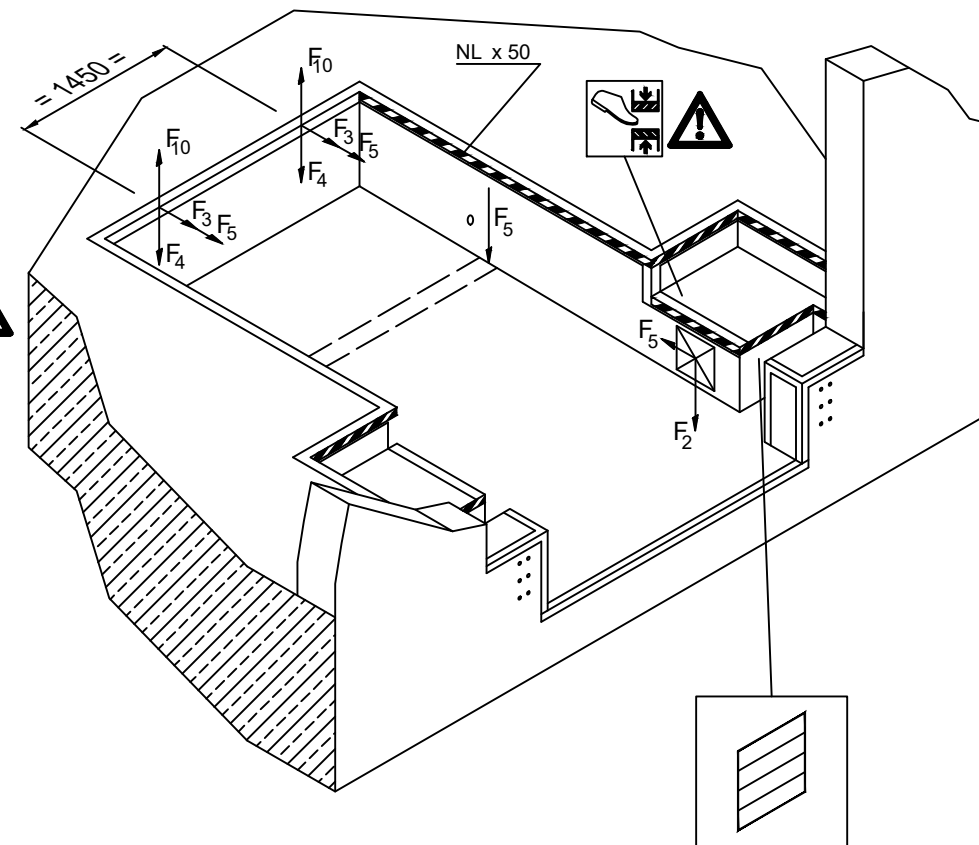
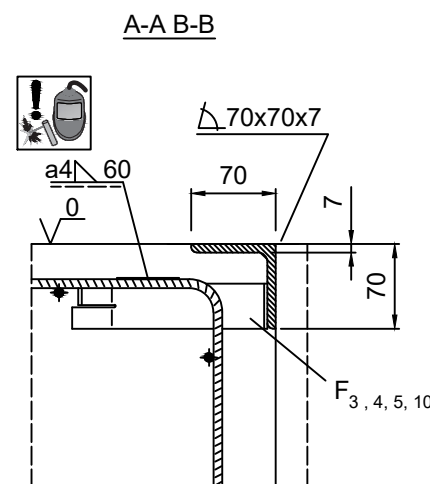
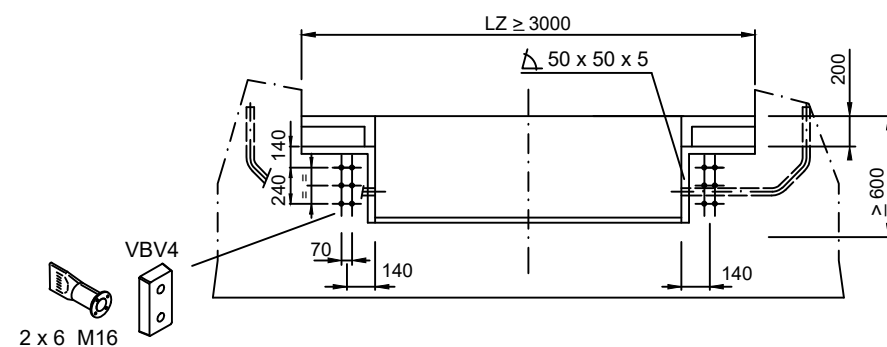
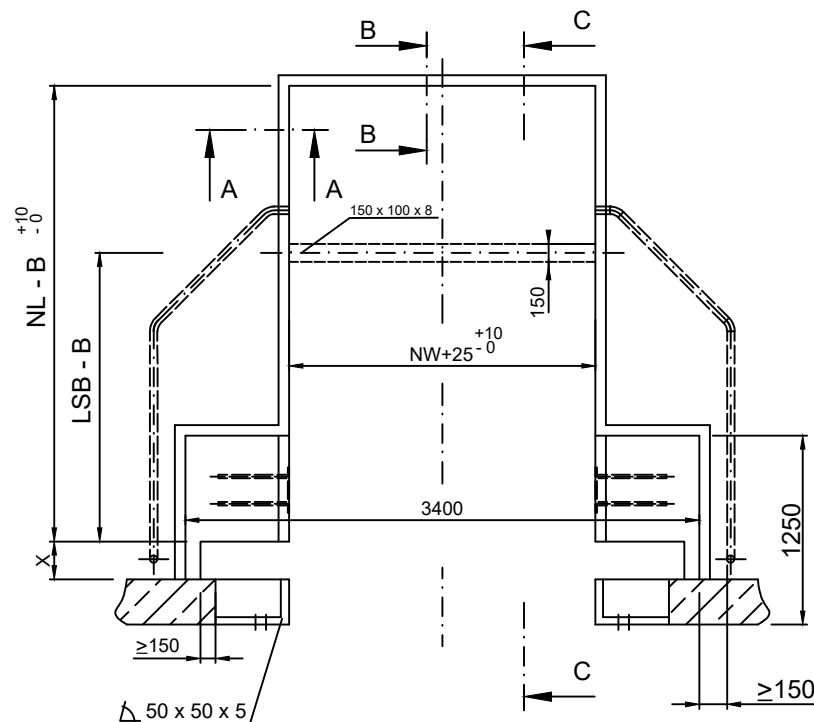


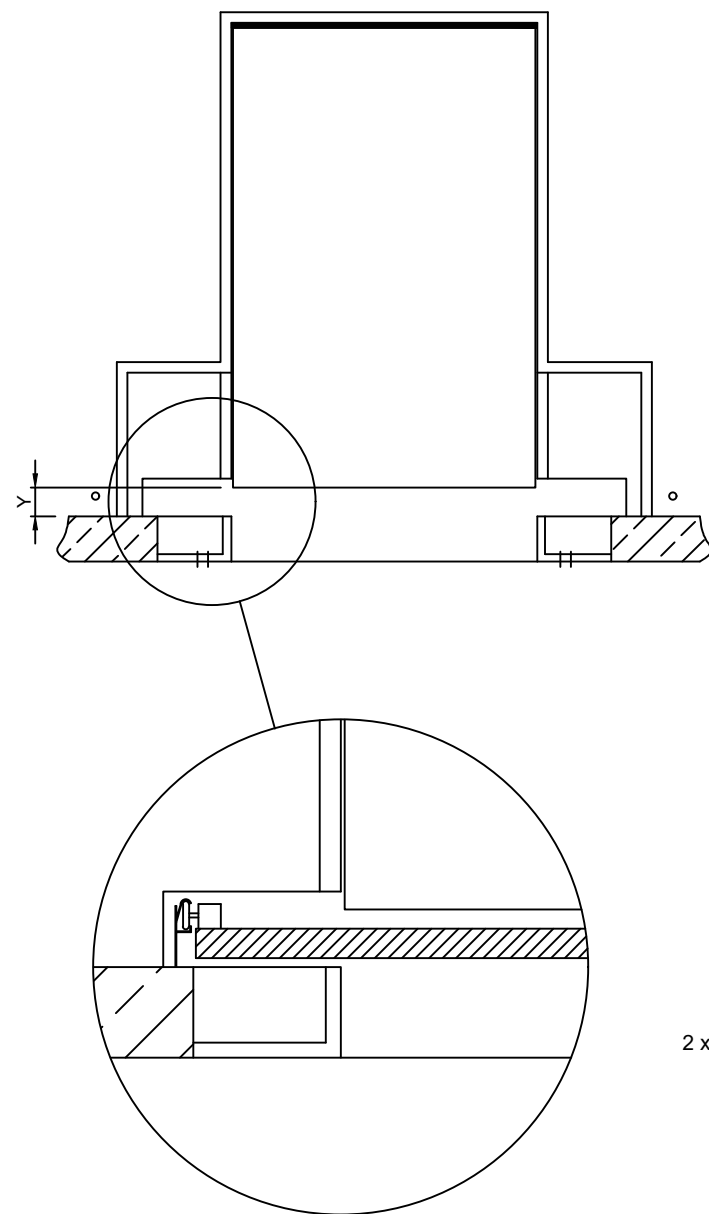


NW
2000 (20-...)
2250 (22,5-...)


NL	3500 (...-35)	4000 (...-40)	4500 (...-45)	5000 (...-50)
NH	745	745	745	745
CGL	2150	2400	2750	2900
CGH	600	600	600	600
LSB	2070	2310	2610	2680



	X	Y	B
ProPlus/ProTrend (без SPK)	200	110	90
ProPlus/ProTrend + SPK	200	190	10






F (kN)	
F ₂	83
F ₃	12
F ₄	56



F (kN)	
F ₅	77
F ₁₀	34

 ≤ 10 km/h



A ≥ C20/25
B ≥ C25/30

ALUTECH TL2 модель PATO
схема подготовки прямка
без ниши под гидроборт