

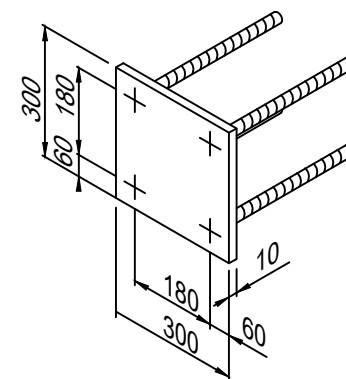
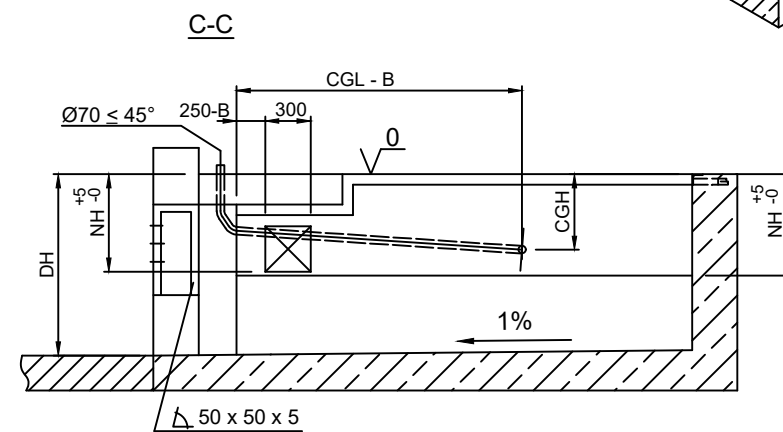
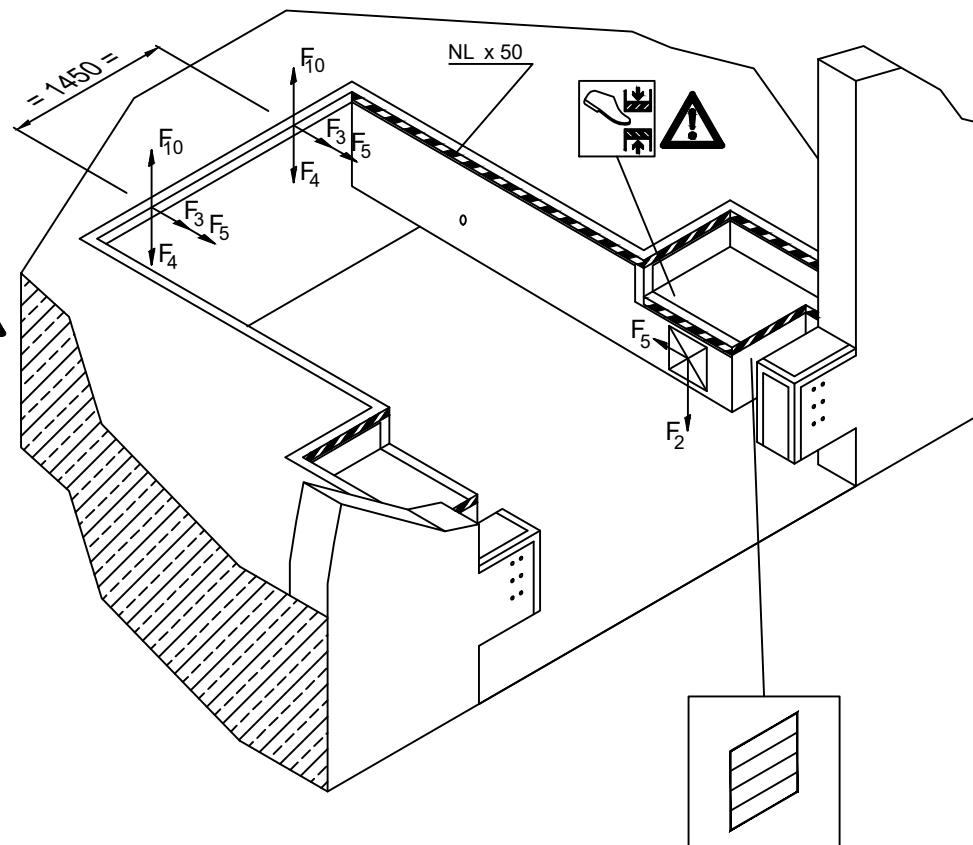
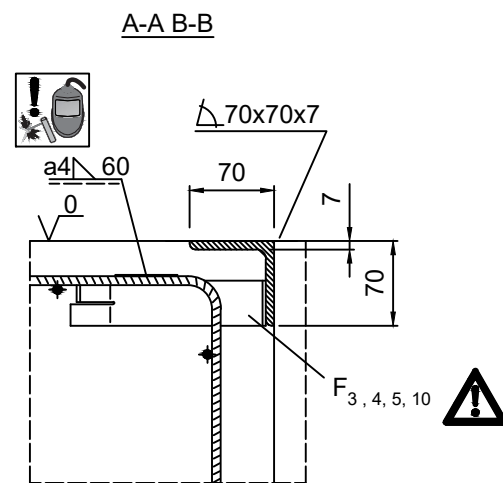
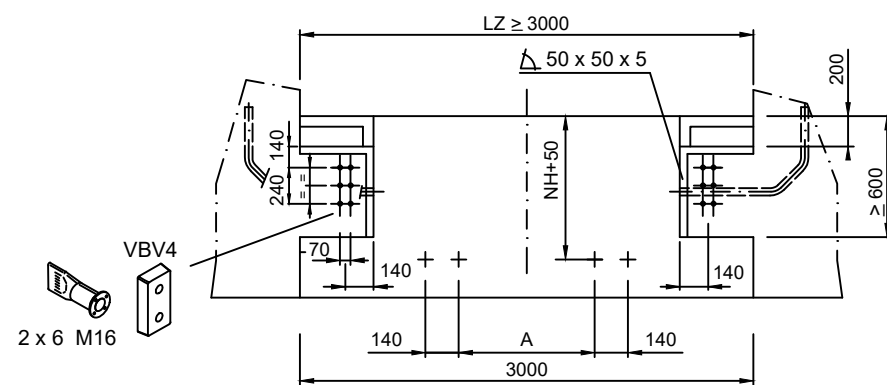
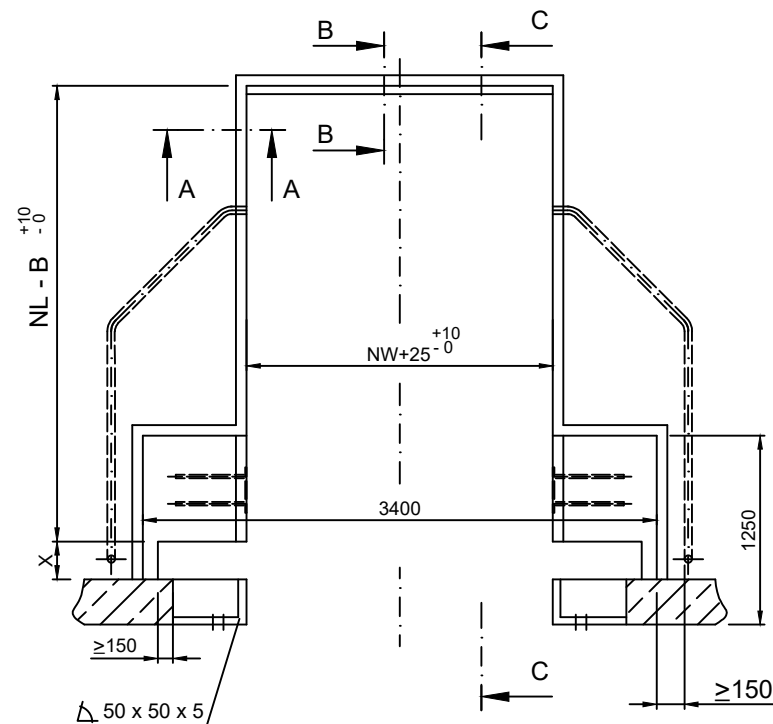


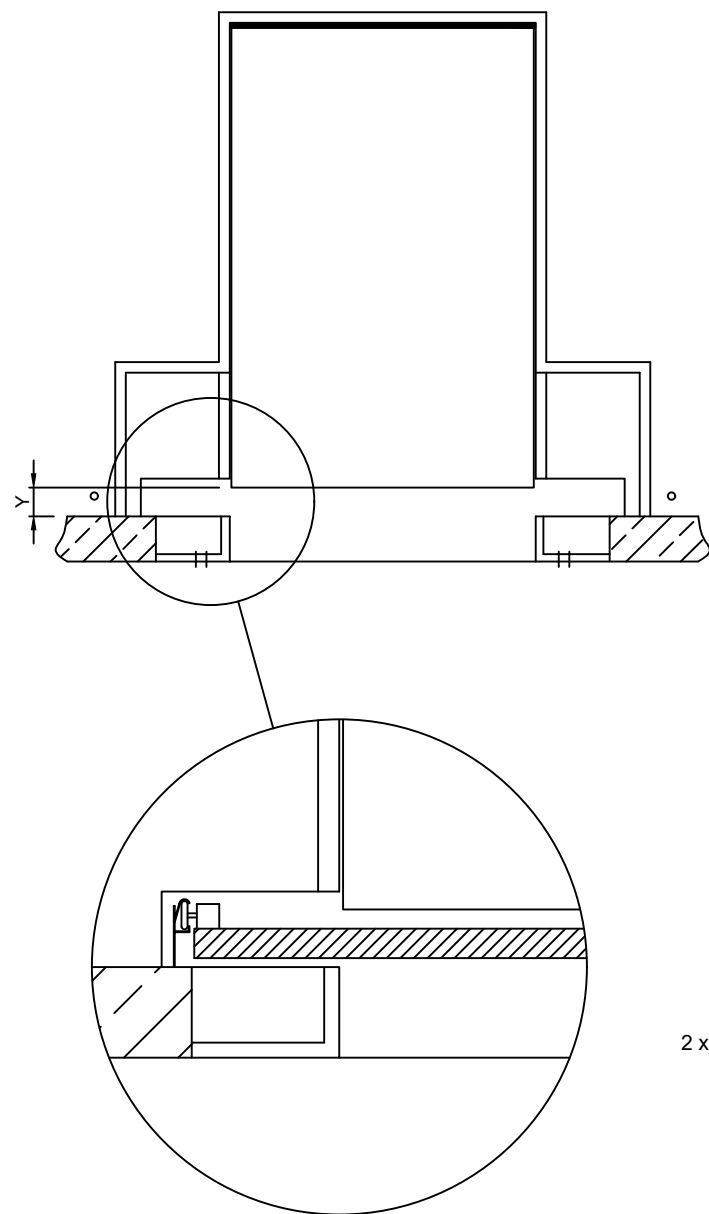


NW	A
2000 (20-...)	1300
2250 (22,5-...)	1550


NL	2000 (...-20)	2500 (...-25)	2750 (...-27,5)	3000 (...-30)
NH	595	595	645	645
CGL	1400	1600	1800	1950
CGH	450	450	500	500



	X	Y	B
ProPlus/ProTrend (без SPK)	200	110	90
ProPlus/ProTrend + SPK	200	190	10





F (kN)	
F ₂	83
F ₃	12
F ₄	56



F (kN)	
F ₅	77
F ₁₀	34

≤ 10 km/h



A ≥ C20/25
B ≥ C25/30

ALUTECH TL2 модель PATO
схема подготовки прямка
с нишей под гидроборт