

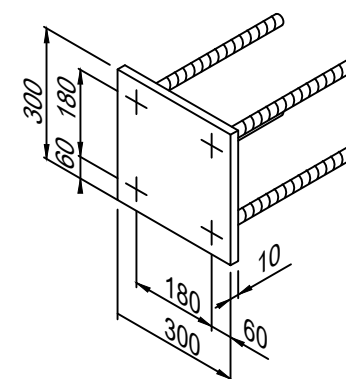
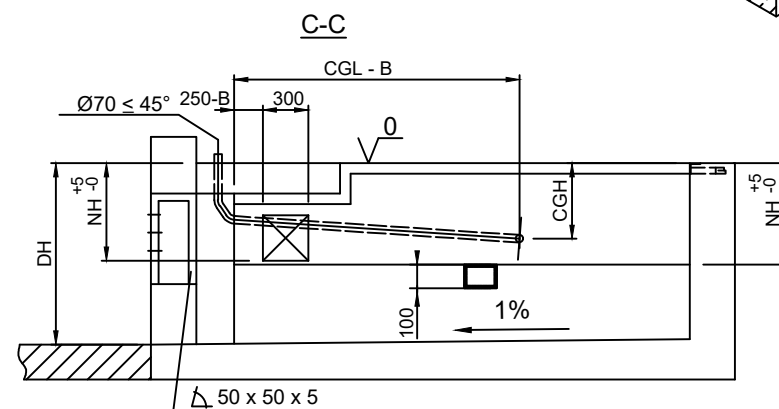
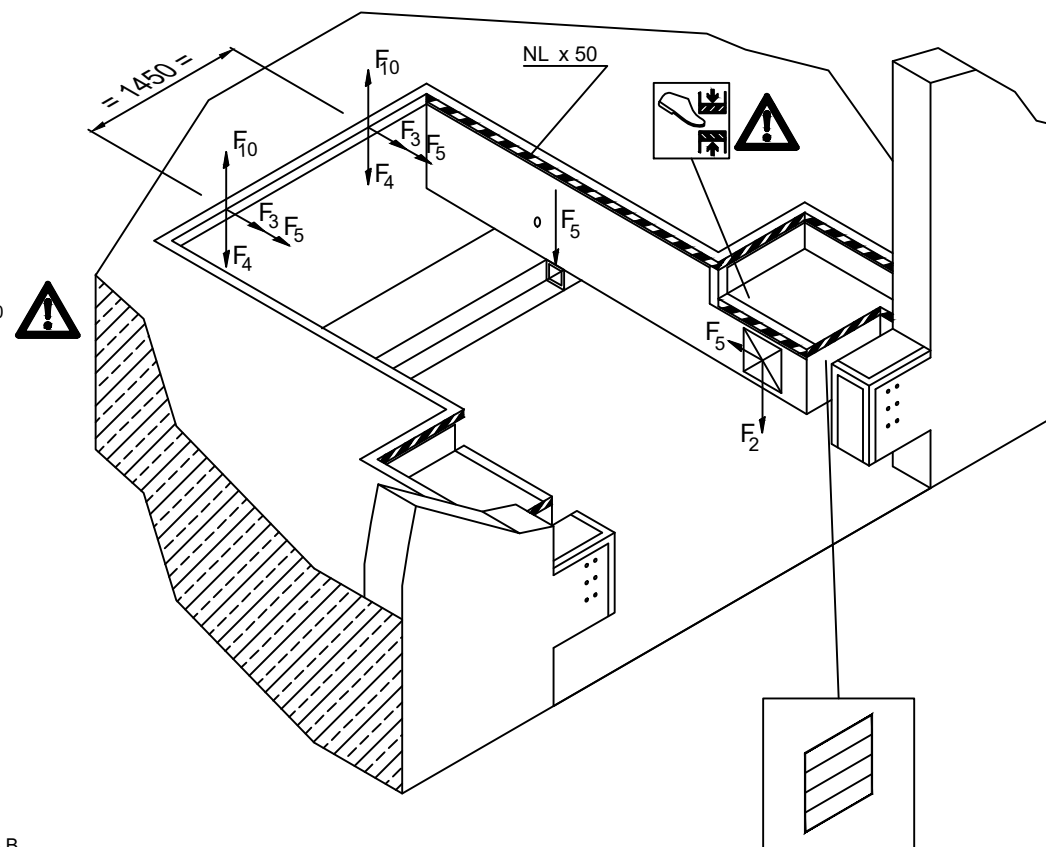
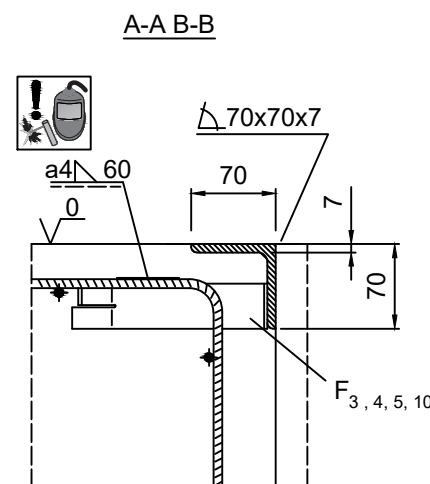
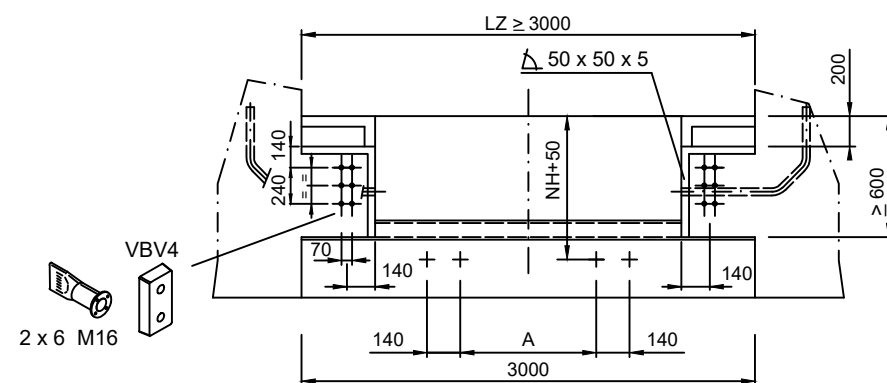
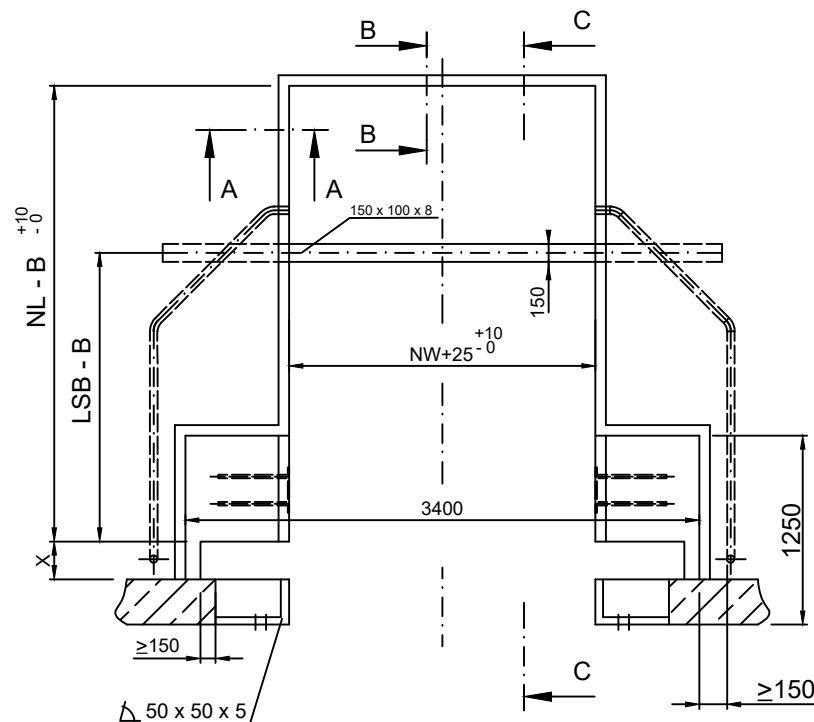


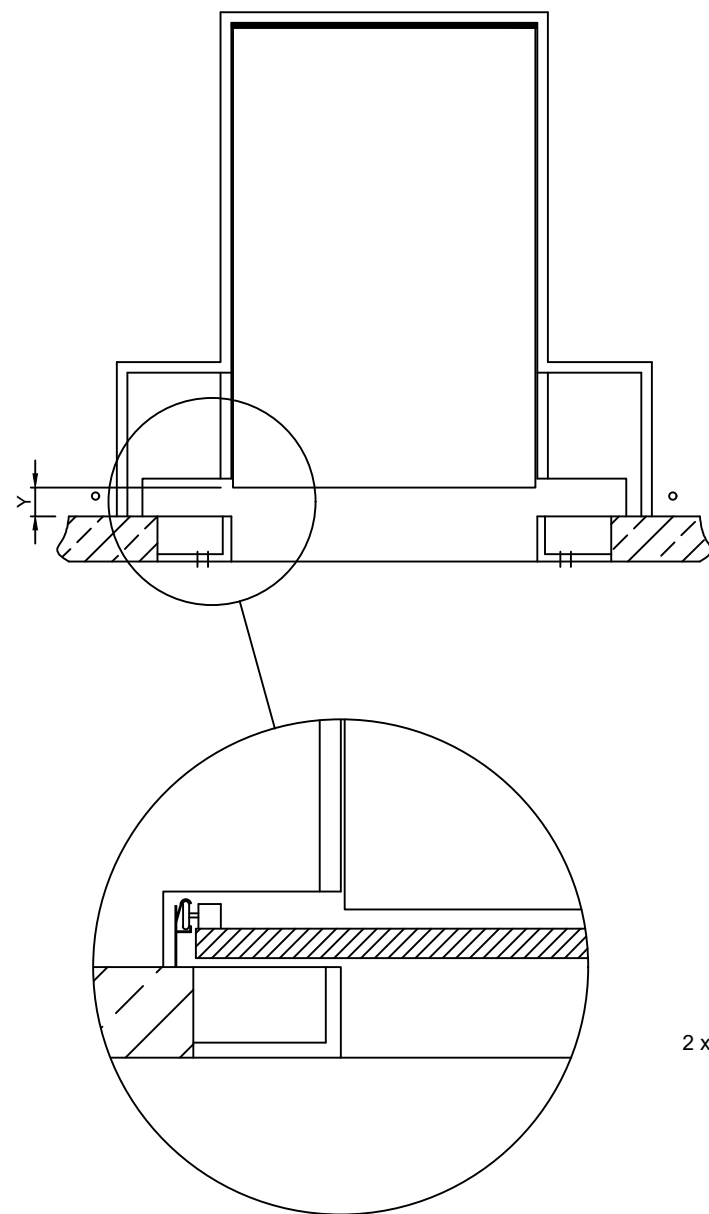


NW	A
2000 (20-...)	1300
2250 (22,5-...)	1550

NL	3500 (...-35)	4000 (...-40)	4500 (...-45)	5000 (...-50)
NH	745	745	745	745
CGL	2150	2400	2750	2900
CGH	600	600	600	600
LSB	2070	2310	2610	2680




	X	Y	B
ProPlus/ProTrend (без SPK)	200	110	90
ProPlus/ProTrend + SPK	200	190	10



F (kN)		F (kN)	
F ₂	83	F ₅	77
F ₃	12	F ₁₀	34
F ₄	56		

 ≤ 10 km/h

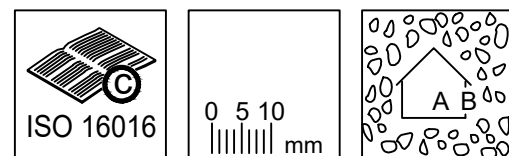

A ≥ C20/25
B ≥ C25/30

ALUTECH TL2 модель PATO
схема подготовки прямка
с нишей под гидроборт